



EASY TO HOLD TOUGH TO BEAT

Why Choose Us?

We boast the largest load testing machine, capable of handling up to 90 tons, reflecting our commitment to engineering excellence.

With over 30 years of experience, we provide a diverse range of products with unparalleled size and load-bearing capacities, tested to international standards.

Our Services



HIGH-TECH COMPOSITE
DEVELOPMENT



LASTING QUALITY
COMMITMENT



SUSTAINABLE PRODUCT
INTEGRATION



TAILORED DRAINAGE
SOLUTIONS

Need More
Information?



+91 - 22 - 40741414



thermodrain@frpmanholecover.com



www.frpmanholecover.com

INDEX		PAGE NO.
1	ABOUT US	2
2	PRODUCT LIST	3
3	PROPERTIES, FEATURES & SPECIAL FEATURES OF FRP / GRP	4-5
4	LOAD TESTING, DO'S & DON'TS, APPLICABLE LOAD BEARING	6
5	SOLID TOP MANHOLE COVERS - SIZES	7
6	COMPARATIVE SOLID TOP MANHOLE COVERS V/S C.I / D.I COVER	8
7	COMPARATIVE SOLID TOP MANHOLE COVERS V/S CONCRETE COVER	9
8	SOLID TOP MANHOLE COVERS -SALIENT FEATURES & PICTURES	10
9	FRP / GRP / COMPOSITE MULTIPLE COVERS WITH FRAME	11
10	RECESS MANHOLE COVERS -SIZES	12
11	RECESS MANHOLE COVERS -SALIENT FEATURES & PICTURES	13
12	AIR & WATER TIGHT COVERS -SIZES	14
13	AIR & WATER TIGHT COVERS -SALIENT FEATURES & PICTURES	15
14	COMPARATIVE THERMODRAIN FRP GRATINGS V/S M.S GRATING	16
15	GRATINGS SIZE CHART FOR 30MM & 40MM HT	17
16	GRATINGS - SALIENT FEATURES, APPLICATION & PICTURES	18
17	TREE GRATINGS -SALIENT FEATURES & PICTURES	19
18	WATER GULLY COVERS - SIZES	20
19	COMP. CHART THERMODRAIN FRP GULLY COVERS V/S C.I/D.I GULLY COVERS	21
20	WATER GULLY COVERS - SALIENT FEATURES, APPLICATION & PICTURES	22
21	HINGED OVERHEADS & UG WATER TANK COVERS	23
22	'L' ANGLE FEATURES	24
23	CHAMBERS	25
24	FRP / GRP DRAIN CHANNELS WITH GRATING / GULLY COVER	26-27
25	ADVANTAGES AND DISADVANTAGES OF FRP / GRP DRAIN CHANNELS	28
26	LIFTING ACCESSORIES	29



ABOUT US


THERMOSET POLY PRODUCTS (I) PVT. LTD.(ISO 9001 : 2015) is a Design and Manufacturing Company located in Navi Mumbai, Maharashtra, India. The company is established in 1993 with industrial equipments being Manufactured for the corrosive industry in India and abroad. Backed with a strong Design, R&D and technical team, we have successfully developed products like windmill nacelle covers in FRP for the wind power industry.

We have developed MECHWOOD - man made artificial wood with zero wooden ingredients (yet to be launched) and FRP/GRP/Composite THERMODRAIN Solid top manhole covers, Recess manhole covers, Air & Water Tight Covers, Multiple Covers, water gully covers, water tank covers, Gratings, L Angles, Drain Channels and Chambers for the sewerage, electrical, telecom and cable chambers. With a strong technical team and in-house testing facility, we have been engaged in developing new products at regular intervals. Our R&D department has enabled us to develop technically superior and cost effective products. Our consistent and technically superior products has enabled us to export and establish our products in different countries. Our team strength of 250 people includes a well spread marketing team in India and abroad.

Our Manufacturing facility of 40,000 sq. ft. is spread over a factory area of 1,60,000 sq. ft. With an intent to manufacture quality products on consistent basis we have been stringently testing our products under third party agencies as per relevant testing standards like BS EN 124, IS 1726, BS 4994 and AASHTO.

OUR FACTORY





PRODUCT LIST

- Solid top manhole covers with frame
- Multiple covers with frame
- Recess manhole cover sizes
- Air and watertight covers with frame
- Gratings
- Water Gully Cover
- Drain channels with grating/gully cover
- Tree gratings
- L angle
- Hinged overhead and u.g. Water tank covers
- Chambers
- Lifting accessories

IN-HOUSE CNC MACHINING SHOP



ISO CERTIFICATE



PROPERTIES OF FRP/GRP

- FRP as a material is resistant to sunlight, water, chemical water, sewerage water.
- UV stabilizer is added to the raw material to impart UV resistance.
- FRP has high impact resistance as it is flexible and not brittle. Hence, in case of excess load bearing, the FRP covers/gratings do not disintegrate into pieces like Cast Iron or Ductile Iron.
- The strength to weight ratio in FRP is much higher than other materials. Hence, the strength is higher even with lesser weight of FRP.
- During manufacturing, FRP cures at a self exothermic temperature of 175°C.
- FRP is a thermoset material (non reversible and cannot be melted) and not a thermo plastic (reversible and can be melted). Hence, the non reprocessability protects it from theft and extreme sunlight does not soften the material.
- FRP is a suitable material under extreme hot and cold conditions.
- FRP can be destroyed by burning in incinerator.

FEATURES OF THERMODRAIN FRP / GRP / COMPOSITE MANHOLE COVERS

- Due to non presence of metal or any other reprocessible material in the cover, our covers are not prone to theft.
- Top 7mm surface is a high abrasion surface.
- All THERMODRAIN covers are available with **double seal** arrangement.
- **The lifting area i.e., the rod type lifting or key hole type (High Strength Plastic Alloy / Stainless Steel - socket type) is closed from the bottom. Hence, it does not allow mosquito breeding in the chambers.**

- THERMODRAIN FRP Manhole Covers are available in standard granite finish and are also available in any other colour specified by client.
- All THERMODRAIN Covers are self pigmented and hence, does not require painting. However, if wanted they can be painted.
- All THERMODRAIN products are UV stabilized and hence, there is no effect of sunlight.
- Due to poor heat transfer properties of FRP, FRP Covers do not absorb heat and remains at normal temperature under sunlight. Hence, it is convenient to handle THERMODRAIN FRP Manhole Covers under extreme hot conditions.
- As the FRP Manhole Covers are flexible and do not disintegrate into pieces due to excess load bearing imparted on the cover, accidents on roads are avoided as the chambers are not left open even in case of cracking of cover.

SPECIAL FEATURES

- All lifting keyholes are bottom closed. This does not allow foul smell to emanate from the Chamber & does not allow foreign particles to enter the Chamber.
- All Manhole Covers are **double seal type**.
- All lifting key holes have **High Strength Plastic Alloy / Stainless Steel** sockets. This does not allow the FRP to get damaged around the key holes due to multiple lifting operations. Please find attached picture of the key hole showing the condition of the keyhole area without insert & condition of "THERMODRAIN" keyhole area with insert.



Condition of the socket type keyhole lifting arrangement of THERMODRAIN FRP manhole covers.







Condition of the Regular keyhole lifting arrangement of other make FRP manhole covers.

LOAD TESTING





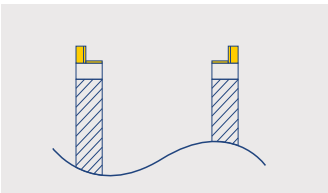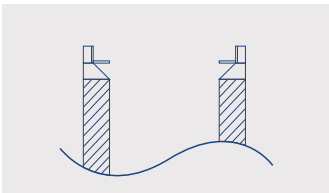

THERMODRAIN FRP / GRP / COMPOSITE products are tested for 2.5 tons, 5 tons, B125 (12.5 tons), C250 (25tons), D400 (40 tons), E600 (60 tons) and F900 (90 Tons) class load bearing and permanent set as per BS EN 124, IS 1726 and AASHTO BS EN 124 is a testing code worldwide for Manhole Covers in cast iron, ductile iron and other Materials also Permanent Set is a multiple loading test to determine the permanent deformation in cover after multiple loading within a short time as specified in the code.



DO'S & DON'TS

Installation		Handing	
Do's	Don't's	Do's	Don't's
			
Correct installation of frame with complete civil support	Load on the frame to be applied only after grouting is completed	Handel with care	Do not throw the material

APPLICABLE LOAD BEARING


Group	Class	Load	Installation Areas	Example	Group	Class	Load	Installation Areas	Example
	F900	90 Ton (900KN)	Areas imposing high wheel loads	Airports		C250	90 Ton (900KN)	Areas imposing high wheel loads	Kerbside parking areas
	F600	90 Ton (900KN)	Areas imposing high wheel loads	Sea ports		B125	12,5 Ton (125KN)	Footways, pedestrain areas and areas with light duty	Parking areas for cars only
	F400	40 Ton (400KN)	Carriageway of roads (including pedestreian ways) and parking areas for all types of road vehicles	Roadways and vehicle traffic		A15	1,5 Ton (15KN)	Areas which can only be used by pedestreian and pedal cyclists	Bicycle ways, pedestreian ways



SOLID TOP MANHOLE COVERS - SIZES

THERMODRAIN FRP / GRP / COMPOSITE SOLID TOP MANHOLE COVERS WITH FRAME

Sr. No.	FRAME OPENING SIZE
	CIRCULAR
1	400 mm (16")
2	450 mm (17")
3	500 mm (20")
4	600 mm (24")
5	690 mm (27")
6	762 mm (30")
7	900 mm (36")
8	1000 mm (40")
9	1400 mm (55") (2 covers with single frame)
	RECTANGULAR
10	600 mm x 450 mm (24" x 18")
11	900 mm x 450 mm (36" x 18")
12	900 mm x 600 mm (36" x 24")
13	990 mm x 1220 mm (40" x 49")
14	1000 mm (40")
	SQAURE
15	300 mm x 300 mm (12" x 12")
16	450 mm x 450 mm (18" x 18")
17	600 mm x 600 mm (24" x 24")
18	675 mm x 675 mm (27" x 27")
19	750 mm x 750 mm (29" x 29")
20	900 mm x 900mm (36" x 36")
21	1000 mm x 1000 mm (40" x 40")
22	1200 mm x 1200 mm (48" x 48")
23	1500 mm x 150mm (60" x 60")



COMPARATIVE CHART

THERMODRAIN FRP / GRP / COMPOSITE MANHOLE COVERS V/S CAST IRON/ DUCTILE IRON MANHOLE COVERS

THERMODRAIN FRP / GRP / Composite Manhole covers



High Strength to Weight Ratio

No scrap Value hence no Theft

Light weight - Easy to Handle

Material Has High Impact Resistance Hence doesn't crack on Impact

Corrosion Resistant. No effect of Sea/ Sewage Water

High Aesthetic Value, Available in Granite Finish or any desired Color

Self pigmented, no painting required

Less Freight & Handling Cost, Due to less weight

No Extra GRP Plate is required to protect from Corrosion

CAST IRON / DUCTILE IRON Manhole covers



Low strength to weight Ratio

High Risk of Theft

Heavy - Needs Manpower

Material is brittle Hence cracks easily on Impact

Gets Corroded by effect of Sea/Sewage Water

Standard Appearance

Painting required at Regular Intervals

High Freight & Handling Cost, Due to more weight

Extra GRP Plate is required to protect from Corrosion



COMPARATIVE CHART

THERMODRAIN FRP / GRP / COMPOSITE MANHOLE COVERS v/s CONCRETE MANHOLE COVERS

THERMODRAIN FRP / GRP / Composite Manhole covers



No Steel Content, No Resale Value, Hence No Theft

High Strength To Weight Ratio

Long Life (20-30 Years)

Light Weight - Easy To Handle

Excellent Abrasion Resistance

No Erosion Due To Rain Water, And Moving Vehicles

No Effect Of Sewage Water & Chemical Water

No Environmental Degradation

Concrete Manhole covers



Theft Happens Due To Presence Of Steel Internally

Low Strength To Weight Ratio

Short Life (2-3 Years)

Heavy - Needs More Manpower

Poor Abrasion Resistance

Gets Eroded Due To Rain Water, And Moving Vehicles.

Poor Resistance To Sewage Water & Chemical Water

High Environmental Degradation

PROPERTIES OF SOLID TOP MANHOLE COVERS

MATERIAL: FRP/GRP/COMPOSITE MATERIAL

THERMODRAIN multiple covers with frame are tested as per BS EN 124, IS1726 & AASHTO M306 standards for drainage and Utility services meeting all requirements of the code. THERMODRAIN Covers are better performing than Cast Iron, Ductile Iron and RCC manhole covers.

SALIENT FEATURES

Load Bearing capacity range: 2.5T (2.5 Tons) to F900 (90 Tons)

Shapes: Circular, square and rectangular shapes available

Seal: Double seal arrangements

- Self pigmented/non painted.
- Non brittle
- All covers can be provided with key locking or bolt locking arrangement.
- All lifting keyholes are in High Strength Plastic Alloy / Stainless Steel, socket type to avoid wear & tear in the lifting area.
- All keyholes have closed bottom (not through & through).
- Permanent set is zero in all sizes & load bearing.



FRP / GRP / COMPOSITE MULTIPLE COVERS WITH FRAME

With a better performance than Cast Iron, Ductile Iron and RCC manhole covers, this product is an industrial revolution. They have been thoroughly tested as per BS EN 124, IS 1726 & AASHTO M306 standards for drainage and utility services. The entire product with FRP / M. S frame is designed and manufactured to the existing chamber size.

SALIENT FEATURES

Load Bearing capacity range: 2.5 tons to 90 tons (F 900).

- All lifting keyholes are in High Strength Plastic Alloy / Stainless Steel, socket type to avoid wear & tear in the lifting area.
- All keyholes have closed bottom (not thru & thru).
- If required the covers are made available with bolt locking arrangement.
- Permanent set is zero in all sizes & load bearing.
- Self pigmented/non painted.
- Non brittle
- Ideal for odd size chambers.
- The frames are M.S epoxy painted with removable supports.



RECESS MANHOLE COVERS - SIZES

THERMODRAIN GRP/FRP/COMPOSITE RECESS MANHOLE COVERS WITH FRAME	
Sr. No.	FRAME OPENING SIZE
	CIRCULAR
1	500 mm (20")
2	600 mm (24")
3	690 mm (27")
4	762 mm (30")
5	900 mm (36")
6	1000 mm (40")
	RECTANGULAR
7	600 mm x 450 mm (24"x18")
8	900 mm x 450 mm (36"x18")
9	900 mm x 600 mm (36"x 24")
10	990 mm x 1220 mm (40"x 49")
	SQUARE
11	300 mm x 300 mm (12"x12")
12	450 mm x 450 mm (18"x18")
13	600 mm x 600 mm (24"x 24")
14	750 mm x 750 mm (29"x 29")
15	900 mm x 900 mm (36"x 36")
16	1000 mm x 1000 mm (40"x 40")
17	1200 mm x 1200 mm (48"x 48")



THERMODRAIN RECESS MANHOLE COVERS

MATERIAL: FRP/GRP/COMPOSITE MATERIAL

THERMODRAIN recess covers with frame are tested as per BS EN 124, IS1726 & AASHTO M306 standards for drainage and Utility services meeting all requirements of the code. THERMODRAIN Covers are better performing than Cast Iron, Ductile Iron and RCC recess covers.

SALIENT FEATURES

- **Load Bearing capacity range:** 2.5T (2.5 Tons) to D400 (40 Tons)
- **Shapes:** Circular, square and rectangular shapes available
- **Seal:** Double seal arrangements
- Lighter and easier to use
- Superior to conventional materials
- 65 mm height is provided for fixing of cement, blocks, tiles or other materials.
- Permanent set is zero in all sizes & load bearing.
- All keyholes have closed bottom (not through & through).



AIR AND WATER TIGHT COVERS - SIZES

THERMODRAIN FRP / GRP / AIR AND WATER TIGHT COVER - SIZES

Sr. No.	FRAME OPENING SIZE
	CIRCULAR
1	400 mm (16")
2	450mm (17")
3	500 mm (20")
4	600 mm (24")
5	690 mm (27")
6	762 mm (30")
7	900 mm (36")
8	1000 mm (40")
9	RECTANGULAR
10	600 mm x 450 mm (24"x18")
11	900 mm x 450 mm (36"x18")
12	900 mm x 600 mm (36"x 24")
13	990 mm x 1220 mm (40"x 49")
	SQAURE
14	300 mm x 300 mm (12"x12")
15	450 mm x 450 mm (18"x18")
16	600 mm x 600 mm (24"x 24")
17	750 mm x 750 mm (29"x 29")
18	900 mm x 900 mm (36"x 36") (2 covers with single frame)
19	1000 mm x 1000 mm (40"x 40")
20	1200 mm x 1200 mm (48"x 48")
21	1500 mm x 1500 mm (60"x 60")


THERMODRAIN AIR AND WATER TIGHT COVERS

MATERIAL: FRP/GRP/COMPOSITE MATERIAL

THERMODRAIN Air and Water Tight Covers are tested as per BS EN 124, ISI726 & AASHTO M306 standards for drainage and Utility services meeting all requirements of the code. THERMODRAIN Covers are better performing than Cast Iron, Ductile Iron and RCC manhole covers.



SALIENT FEATURES

- **Load Bearing capacity range:** 2.5T (2.5 Tons) to F900 (90 Tons)
- **Shapes:** Circular, square and rectangular shapes available
- **Seal:** Double seal arrangements
- THERMODRAIN Air and Water Tight covers are available without bolting
- Covers are available with locally found replaceable gasket in case of damage
- No foul smell or seepage

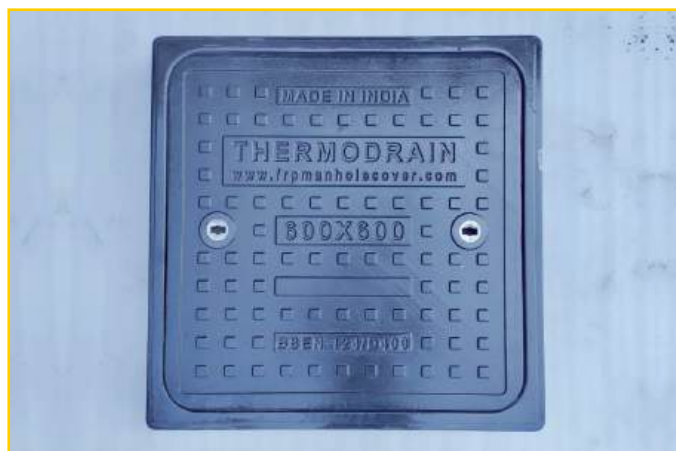

COMPARATIVE CHART

THERMODRAIN FRP/GRP GRATING v/s MILD STEEL GRATINGS

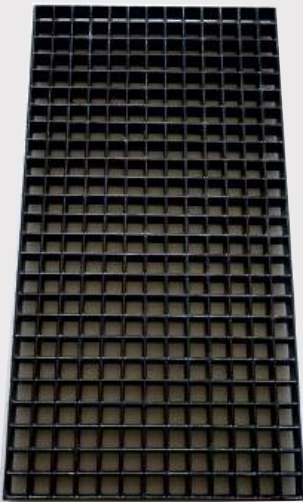THERMODRAIN FRP / GRP / GRATING	MILD STEEL GRATINGS
	
High Strength To Weight Ratio No Scrap Value Hence No Theft Light Weight - Easy To Handle	Low Strength To Weight Ratio High Risk of Theft
Material Has High Impact Resistance Hence	Heavy Needs More Manpower
Doesn't Permanently Bend Due To Moving Vehicles	Material Permanently Bends Due To Moving Vehicles
Corrosion Resistant, No Effect of Sea / Sewage Water	Gets Corroded By Sewage & Sea Water
No Algae Formation	Algate is Easily Formed Over Metal Surface
High Aesthetic Value, Available In Dark Grey or Any Desired Color	Standard Appearance
Self Pigmented. No Painting Required	Painting required at Regular Intervals
Less Freight & Handling Cost, Due to Less Weight	High Freight & Handling Cost, Due to more weight
No Maintenance Required	Painting Required Periodically To Save From Rusting

SIZES OF GRATINGS

30mm & 40mm HEIGHT GRATING

48	1279
88	1319
128	1359
167	1399
207	1438
247	1478
286	1518
326	1557
366	1597
406	1637
445	1677
485	1716
525	1756
564	1796
604	1836
644	1875
684	1914
723	1955
763	1993
803	2034
843	2074
882	2114
922	2154
962	2194
1001	2234
1041	2273
1081	2314
1121	2353
1160	2393
1200	2340
1240	



THERMODRAIN GRATINGS

SALIENT FEATURES:

- ZERO filler content. Hence, there are no air pockets and it does not require painting or coating.
- High impact resistance compared to gratings with filler content
- Self pigmented - Not painted
- One piece moulded jointless (Interwoven construction)

AREAS OF APPLICATION:

- Swimming Pool
- Industrial Plants
- Podiums
- Basement Car Park
- Storm water drain trenches
- Cable trenches

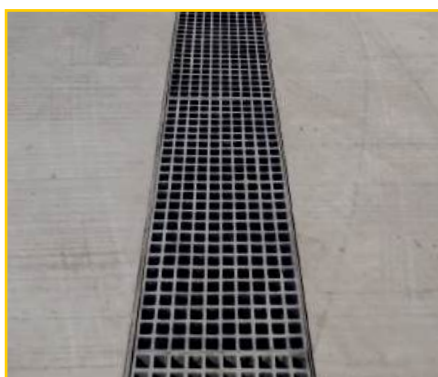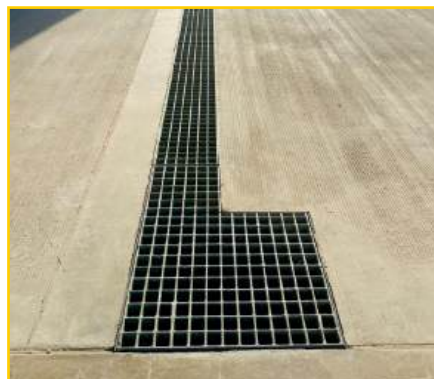


TREE GRATINGS

SALIENT FEATURES:

- Tree Gratings are self pigmented, non painted.
- Tree Gratings are available in two piece or four piece for ease of installation.
- Tree Gratings protect the soil and allow pedestrians to walk near the tree without compacting the soil.
- Tree Gratings allow the rain water to penetrate the soil.
- Tree Gratings improve the landscaping and aesthetics of the surrounding with it's artistic design.





WATER GULLY COVERS - SIZES

THERMODRAIN GRP/FRP WATER GULLY COVERS (WITH / WITHOUT FRAME)

Sr. No.	FRAME CLEAR OPENING & COVER OUT TO OUT SIZE	
RECTANGULAR		
1	Frame Clear opening Cover Out to Out	640 mm x 240 mm 700 mm x 300 mm
2	Frame Clear opening Cover Out to Out	385 mm x 317 mm 445 mm x 377 mm
3	Frame Clear opening Cover Out to Out	500 mm x 600 mm 560 mm x 660 mm
4	Frame Clear opening Cover Out to Out	900 mm x 600 mm 960 mm x 660 mm
5	Frame Clear opening Cover Out to Out	450 mm x 450 mm 515 mm x 515 mm
6	Frame Clear opening Cover Out to Out	600 mm x 600 mm 660 mm x 660 mm
7	Frame Clear opening Cover Out to Out	750 mm x 750 mm 816 mm x 816 mm
8	Frame Clear opening Cover Out to Out	900 mm x 900 mm 966 mm x 966 mm
SQUARE		
1	Frame Clear opening Cover Out to Out	300 mm x 300 mm 360 mm x 360 mm
2	Frame Clear opening Cover Out to Out	450 mm x 450 mm 515 mm x 515 mm
3	Frame Clear opening Cover Out to Out	600 mm x 600 mm 660 mm x 660 mm
4	Frame Clear opening Cover Out to Out	750 mm x 700 mm 816 mm x 816 mm
5	Frame Clear opening Cover Out to Out	900 mm x 900 mm 966 mm x 966 mm

COMPARATIVE CHART

THERMODRAIN FRP/GRP/COMPOSITE WATER GULLY COVERS V/S CAST IRON / DUCTILE IRON WATER GULLY COVERS

THERMODRAIN FRP/GRP/COMPOSITE WATER GULLY COVERS



High Strength To Weight Ratio No Scrap Value
Hence No Theft

Light Weight - Easy To Handle

Material Has High Impact Resistance Hence Doesn't
Permanently Bend Due To Moving Vehicles

Corrosion Resistant, No Effect of Sea / Sewage Water

No Algae Formation

High Aesthetic Value, Available In
Dark Grey or Any Desired Color

Any Desired Color

Self Pigmented. No Painting Required

Less Freight & Handling Cost, Due To
Less Weight No Maintenance Required

Not Prone To Accident, As FRP Is Not Brittle, Hence It
Does Not Collapse In The Chamber Due To Overload

CAST IRON / DUCTILE IRON WATER GULLY COVERS



Low Strength To Weight Ratio
High Risk of Theft

Heavy - Needs More Manpower

Material Is Brittle Hence Easily Cracks On Impact

Gets Corroded By Sewage & Sea Water Algae
Is Easily Formed Over Metal Surface

Standard Appearance

Painting Required at Regular Intervals

Gets Corroded By Sewage & Sea Water Algae
Is Easily Formed Over Metal Surface

Higher Freight and Handling Cost,
Due To More Weight

Painting Required Periodicaly
To Save From Rusting

Prone To Accident, As Material Is Brittle, Hence
It Collapses In The Chamber Due To Overload

WATER GULLY COVERS

MATERIAL: FRP/GRP/COMPOSITE MATERIAL

THERMODRAIN Water Gully Covers are tested as per BS EN 124, IS1726 & AASHTO M306 standards for drainage and Utility services meeting all requirements of the code. THERMODRAIN Water Gully Covers are better performing than Cast Iron, Ductile Iron and RCC manhole covers.

SALIENT FEATURES

Load Bearing capacity range: 2.5T (2.5 Tons) to E600 (60 Tons)

Sizes: Available in all standard sizes. Please find all sizes available on the previous page.

- Permanent set is zero in all sizes and load bearings.
- Self Pigmented / Non Painted
- Minimum opening is more than 30% of clear opening size for smooth flow of water.

AREAS OF APPLICATIONS

- Industrial Plants
- Basement Car Park
- Podiums
- Storm Water Drain Trenches





HINGED OVERHEAD AND U.G. WATER TANK COVERS

MATERIAL: FRP/GRP/COMPOSITE MATERIAL

THERMODRAIN Water Tank Covers are tested as per BS EN 124. THERMODRAIN Water Tank Covers are better performing than Cast Iron, Ductile Iron and RCC manhole covers.

Load Bearing capacity range: 500 kgs for Overhead Application
2.5 Tons - 60 Tons (E600) for Underground applications

Shapes: Circular, square and rectangular shapes available

Seal: Single seal arrangements

- Covers have a provision for gasket fitting.
- Self Pigmented / Non Painted
- 550kg covers have a provision for locking as a standard feature.
- Moss and aglae formation do not happen in our covers.

OVERHEAD WATER TANK COVERS - CHART

THERMODRAIN FRP/GRP/COMPOSITE WATER TANK COVERS WITH FRAME (180 degree opening with hinge & locking arrangement)

Sr.No	FRAME OPENING SIZE
1	600 mm (24")
2	600 mm x 600 mm (24"x 24") 750 mm (30")
3	750 mm (30")
4	750 mm x 750 mm (30"x 30")







THERMODRAIN L ANGLE

KEY ADVANTAGES OF FRP/GRP L ANGLE

- Corrosion resistance
- Self Pigmented, no painting required
- Chemical resistance
- Non-conductivity (thermally and electrically)
- Having non-magnetic electromagnetic transparency Being
- lightweight
- High-strength & durability
- Impact resistant
- Dimensional stability
- A long life cycle
- Low-maintenance

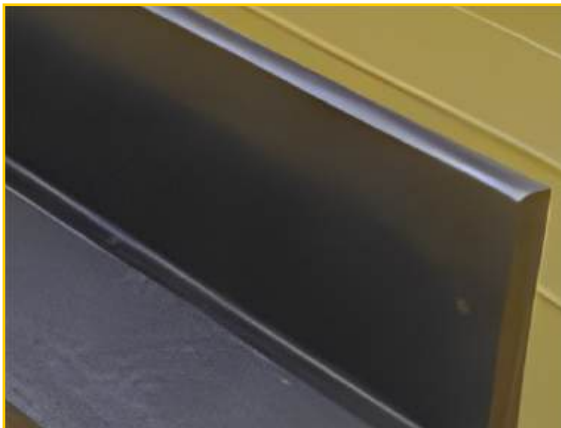



THERMODRAIN CHAMBERS

SPECIFICATIONS

- High strength chambers made out of specially prepared resin.
- UV Stabilised
- Can take any type of traffic load
- Load tested up to 60 Tons
- Can withstand earth vibrations due to traffic
- Tested as per ASTM D 3753 & IS 12592-2008 standards



ADVANTAGES OF THERMODRAIN CHAMBERS

- 100% Corrosion Free.
- Can be readily mounted by digging the Earth, making the concrete at the bottom & fixing it.
- Completely leak proof.
- All sizes are available.
- THERMODRAIN FRP Chambers are relocatable.
- Can also be used as Inspection Chambers.



FRP/GRP DRAIN CHANNELS WITH GRATING / GULLY COVER

Method Of Installation Of Thermodrain (1 Piece Type) For Surface Drainage For Exterior And Basements (recommended For Short Length Upto 30 Mtrs)

STEP 1 - Prepare a trench of 200 mm extra width than the drain channel width.

STEP 2 - Before laying the Drain channel, check the compactness of the soil and ensure that its compact enough and will not sink due to the load that will be eventually applied on the Grating (refer your civil or soil consultant). In case the soil is found to not take the load than you may create a concrete bed to resist the load with the slope of 1 mm/mtr. for water to flow by gravity.

STEP 3 - Once the concrete/mud bed is ready, you may place the Drain channel in position. The channel installation is to begin from the starting point and proceed towards the exit point.

STEP 4 - You may apply the Silicone sealant on the step given in the channel for joining with the connecting channel or Bend or Tee or Four way Tee. On applying the sealant you may place the connecting piece on the step and continue to place the further connecting pieces in the same manner.

STEP 5 - The connectors like the 90 deg. Bend, Tee and Fourway Tee are to be used as and where required depending on the layout of your site.

STEP 6 - You may refill the empty space around the channel network with the concrete and soil (As shown in the drawing) and do the required compaction and bring it to the level of the installed grating. Once the filling is completed and cured you may clean the drain channel and you may place the gratings/ Gully covers on the channel network.

Method Of Installation Of Thermodrain (2 Piece Type) For Surface Drainage For Exterior And Basements (recommended For Short & Long Lengths)

STEP 1 - Prepare a trench of 200 mm extra width than the drain channel width.

STEP 2 - Before laying the Drain channel, check the compactness of the soil and ensure that its compact enough and will not sink due to the load that will be eventually applied on the Grating (refer your civil or soil consultant). In case the soil is found to not take the load than you may create a concrete bed to resist the load with the slope of 1 mm/mtr. for water to flow by gravity.


STEP 3 - Once the concrete/mud bed is ready, you may place the Drain channel in position. The channel installation is to begin from the starting point and proceed towards the exit point.

STEP 4 - You may apply the Silicone sealant on the step given in the channel for joining with the connecting channel or Bend or Tee or Four way Tee. On applying the sealant you may place the connecting piece on the step and continue to place the further connecting pieces in the same manner.



STEP 5 - The connectors like the 90 deg. Bend, Tee and Fourway Tee are to be used as and where required depending on the layout of your site.

STEP 6 - You may refill the empty space around the channel network with the concrete and soil (As shown in the drawing) and do the required compaction and bring it to the level of the installed grating. Once the filling is completed and cured you may clean the drain channel and you may place the gratings/ Gully covers on the channel network.

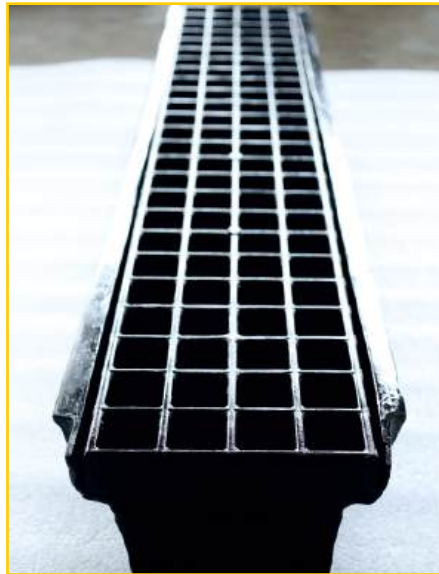

THERMODRAIN FRP/GRP/COMPOSITE DRAIN CHANNEL WITH GRATING / GULLY COVER

Sr.No	OUT TO OUT DRAIN CHANNEL SIZE
1	128 mm(w) x 155 mm(ht.) x 1000 mm(lt.)
2	167 mm(w) x 155 mm(ht.) x 1000 mm(lt.)
3	326 mm(w) x 300 mm(ht.) x 1000 mm(lt.)
4	525 mm(w) x 300 mm(ht.) x 1000 mm(lt.)

ADVANTAGES OF FRP/GRP DRAIN CHANNELS

- Blocks site space for minimum time
- Quick to install as the channel is only to be laid as per manual.
- Minimum manpower is required.
- **Very low labour** cost is incurred for installation.
- Installation is fast and simple and not dependent on huge manpower availability.
- No water proofing is required.
- Separate MS/FRP angles are not required for placement of Gratings/Gully covers
- No hidden cost during installation of channels.

DISADVANTAGES OF CEMENT / CONCRETE DRAIN CHANNELS

- Site remains blocked due to larger preparation time of cement drains
- Long installation time as large amount of civil work is required.
- Huge manpower is required for civil work.
- Very high labour cost is incurred for drain preparation.
- Preparation of drain channel is slow as it is highly dependent on manpower availability.
- Water proofing is to be done.
- Separate MS/FRP angles are required for placements of Gratings/Gully covers.
- There is hidden cost during making of drain channels as it is labour oriented.


LIFTING ACCESSORIES

Lifters are used to ensure that Manhole covers are being lifted with ease and to ensure that there is no damage to the cover while lifting. These lifters can be used to lift Circular, Square or Rectangular manhole covers.

Sizes applicable:

Square / Rectangular: All sizes from 300 x 300 to 1500 x 1500

Circular: All sizes from 300 mm dia to 900 mm dia

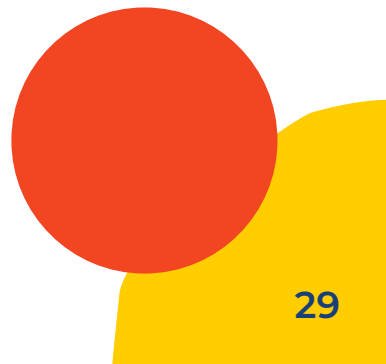



CONTACT US:

CORPORATE OFFICE
THERMOSET POLY PRODUCTS(I) PVT LTD.

Arenja Plaza, C-302, 3rd Floor, Plot No: 52, Sector - 15, CBD Belapur Navi Mumbai - 400 614,
Maharashtra, India

Telefax: 91-22-4074 1414 (30 Lines)

Email: thermodrain@frpmanholecover.com

Website : www.frpmanholecover.com

FRP/GRP/COMPOSITE Solid Top Manhole Covers With Frame, Multiple Covers With Frame, Recess Manhole Covers With Frame, Air & Water Tight Covers With Frame, Gratings, L Angle, Water Gully Covers With Frame, Hinged Overhead And U. G. Water Tank Covers With Frame, Chambers, Drain Channels With Grating / Gully Cover.

www.frpmanholecover.com